Agilent U1401A/U1401B Handheld Multi-function Calibrator/Meter

Data Sheet

Calibrate *while* you measure with just one tool

Agilent handheld multi-function calibrator/meter has all you need for quick validation, servicing or troubleshooting of process control devices on the go. Travel and test easily with one rugged, feature-packed tool. Agilent now offers its latest handheld calibrator/meter, the U1401B in all-new orange, providing capabilities and functions equivalent to the U1401A.

Features

- Dual display with bright LCD backlight
- Simultaneous source and measure
- Bipolar voltage and current, square-wave, auto scan and ramp outputs
- Full-span DMM capability, including temperature and frequency measurements
- Hold and Min/Max/Average recordings
- Data logging to PC with optional IR-to-USB cable
- Built-in charging capability

The 2-in-1 that helps you travel light

More often than not, the calibration of process control parts requires simultaneous measurements with a DMM. With the U1401A/U1401B, you can carry two tools in one—and calibrate while you measure. Slip the U1401A/U1401B in its sturdy carrying case and you're ready to go.

Full-featured DMM functions

The U1401A/U1401B is packed with a full span of DMM measurement functions, including AC+DC voltage and current, resistance, temperature, frequency, diode and continuity tests. It also equips you with recording functions such as Hold, Min/Max/Average and data logging to PC.

Rugged and tested to stringent standards

The U1401A/U1401B comes with a robust protective holster and tested to stringent industrial standards. Each U1401A/U1401B is also sealed with a three-year warranty and the assurance that you can perform your calibration tasks with confidence.

Agilent Technologies

Take a closer look

Robust protective holster

Hold and Min/Max/Avg recordings

Built-in battery-charging capability

Bipolar voltage and current, square-wave, auto scan and ramp

Dual display with backlight

4-20 mA and 0-20 mA percentage scale readout

Easy function access through intuitive buttons and rotary switch

Voltage, current, resistance, temperature, frequency, pulse width, duty cycle, diode and continuity

Simultaneous source and measure

Input Specifications

The accuracy is given as ± (% of reading + counts of least significant digit (LSD)) at 23 °C ± 5 °C, with relative humidity less than 80% R.H., and after a warm-up period of at least five minutes. Without warm-up, an additional five counts of LSD need to be considered.

Voltage specifications

Function	Range	Resolution	Accuracy	Overload protection
DC voltage [1]	50 mV	1 µV	0.05% + 50 [2]	250 Vrms
	500 mV	10 µV	0.03% + 5	
	5 V	0.1 mV		
	50 V	1 mV		
	250 V	10 mV		
AC voltage [3] **(True-rms: From 5% to 100% of range)**	50 mV	1 µV	**45 Hz to 5 kHz:** 0.7% + 40 **5 kHz to 20 kHz:** 1.5% + 40	
	500 mV	10 µV	**45 Hz to 5 kHz:** 0.7% + 20 **5 kHz to 20 kHz:** 1.5% + 20	
	5 V	0.1 mV		
	50 V	1 mV		
	250 V	10 mV		
AC+DC voltage [3] **(True-rms: From 5% to 100% of range)**	50 mV	1 µV	**45 Hz to 5 kHz:** 0.8% + 70 **5 kHz to 20 kHz:** 1.6% + 70	
	500 mV	10 µV	**45 Hz to 5 kHz:** 0.8% + 25 **5 kHz to 20 kHz:** 1.6% + 25	
	5 V	0.1 mV		
	50 V	1 mV		
	250 V	10 mV		

[1] Input impedance: 10 MΩ (nominal) for the range of 5 V and above, and 1 GΩ (nominal) for the 50/500 mV range.

[2] Accuracy can be improved to 0.05% + 5. Always use the Relative function to offset thermal effects before measuring the signal.

[3] Input impedance: 1.1 MΩ in parallel with <100 pF (nominal) for the range of 5 V and above, and 1 GΩ (nominal) for the 50/500 mV range. Crest factor ≤ 3.

Current specifications

Function	Range	Resolution	Accuracy	Burden voltage/shunt	Overload protection
DC current	50 mA	1 µA	0.03% + 5 [1]	0.06 V (1 Ω)	250 V, 630 mA Quick acting fuse
	500 mA	10 µA		0.6 V (1 Ω)	
AC current [2] (True-rms: From 5% to 100% of range)	50 mA	1 µA	**45 Hz to 5 kHz:** 0.6% + 20	0.06 V (1 Ω)	
	500 mA	10 µA		0.6 V (1 Ω)	
AC+DC current [2] (True-rms: From 5% to 100% of range)	50 mA	1 µA	**45 Hz to 5 kHz:** 0.7% + 25	0.06 V (1 Ω)	
	500 mA	10 µA		0.6 V (1 Ω)	

[1] Always use the Relative function to offset thermal effects before measuring the signal. If this function is not used, accuracy could go down to 0.03% + 25. Thermal effects may be present due to:

- Constant current, constant voltage, or square wave output.
- Wrong operation. For example, resistance, diode, or mV measurement function is used to measure high voltage signals exceeding 250 V.
- After battery charging has completed.
- After measuring current greater than 50 mA.

[2] Crest factor ≤ 3

Temperature specifications

Thermocouple type	Range	Resolution	Accuracy [1]	Overload protection
K	–40 °C to 1372 °C	0.1 °C	0.3% + 3 °C	250 Vrms
	–40 °F to 2502 °F	0.1 °F	0.3% + 6 °F	

Resistance specifications

The following resistance specifications are valid if the maximum open voltage is less than +4.8 V.

Range	Resolution	Accuracy	Minimum input current	Overload protection
500 Ω	0.01 Ω	0.15% + 8 [2]	0.45 mA	250 Vrms
5 kΩ	0.1 Ω	0.15% + 5 [2]	0.45 mA	
50 kΩ	1 Ω		45 µA	
500 kΩ	10 Ω		4.5 µA	
5 MΩ	0.1 kΩ		450 nA	
50 MΩ	1 kΩ	1% + 8 [3]	45 nA	

Diode and continuity specifications

For diode test, the overload protection is 250 Vrms and the instrument will beep when the reading is below 50 mV (approx). For continuity test, the instrument will beep when the resistance is less than 10.00 Ω.

Resolution	Accuracy	Test current	Open voltage
0.1 mV	0.05% + 5	Approximately 0.45 mA	< +4.8 VDC

1 ms peak hold specifications

Signal width	Accuracy for DC mV/voltage/current
Single event >1 ms	2% + 400 for all ranges

[1] Accuracy is specified for meter operation only, excludes thermocouple probe tolerance and with the instrument placed in the operating area for at least one hour.
[2] Accuracy is specified after applying the Relative function to offset any test lead resistance and thermal effect.
[3] Accuracy is specified for <60% R.H.

Frequency specifications

Range	Resolution	Accuracy	Minimum input frequency	Overload protection
100 Hz	0.001 Hz	0.02% + 3	1 Hz	250 Vrms
1 kHz	0.01 Hz			
10 kHz	0.1 Hz			
100 kHz	1 Hz			
200 kHz	10 kHz			

Frequency sensitivity and trigger level for voltage measurement

Input range	Minimum sensitivity (rms sine wave)		Trigger level for DC coupling	
	1 Hz to 100 kHz	>100 kHz	<20 kHz	20 kHz to 200 kHz
50 mV	15 mV	25 mV	20 mV	30 mV
500 mV	35 mV	50 mV	60 mV	80 mV
5 V	0.3 V	0.5 V	0.6 V	0.8 V
50 V	3V	5 V	6 V	8 V
250 V	30 V	–	60 V	–

Frequency sensitivity for current measurement

Input range	Minimum sensitivity (rms sine wave)
	30 Hz to 20 kHz
50 mA	2.5 mA
500 mA	25 mA

Duty cycle and pulse width

Function	Mode	Range	Accuracy at full scale [1]
Duty cycle	DC coupling	0.1% to 99.9%	0.3% per kHz + 0.3%
	AC coupling	5% to 95%	
Pulse width [2]	–	0.01 ms to 1999.9 ms	0.2% + 3

[1] Accuracy is based on a 5-V square-wave input to the 5 VDC range.
[2] Pulse width must be greater than 10 µs and its range is determined by the frequency of the signal.

Output Specifications

Accuracy is given as ± (% of output + counts of least significant digit (LSD)) at 23 °C ± 5 °C, with relative humidity less than 80% R.H., and after a warm-up period of at least five minutes. The maximum input voltage protection is 30 VDC.

Constant voltage and current outputs

Function	Range	Resolution	Accuracy	Minimum output
Constant voltage (CV)	± 1.500 V	0.1 mV	0.03% + 3	25 mA or above [1]
	± 15.000 V	1 mV		
Constant current (CC)	± 25.000 mA	1 µA	0.03% + 5	12 V or above [2][3]

Square wave output

Output	Range	Resolution	Accuracy
Frequency (Hz)	0.5, 1, 2, 5, 10, 15, 20, 25, 30, 40, 50, 60, 75, 80, 100, 120, 150, 200, 240, 300, 400, 480, 600, 800, 1200, 1600, 2400, 4800	0.01	0.005% + 1
Duty Cycle (%) [4]	0.39% to 99.60%	0.390625%	0.01% + 0.2% [5]
Pulse Width (ms) [4]	1/Frequency	Range/256	0.01% + 0.3 ms
Amplitude (V)	5 V, 12 V	0.1 V	2% + 0.2 V
	±5 V, ±12 V		2% + 0.4 V

[1] Loading coefficient: 0.012 mV/mA for 1.5 V output.

[2] Loading coefficient: 1 µA/ V. The minimum output voltage is based on 20 mA into a 600 Ω load.

[3] If the current loop has a 24-V power, a minimum output voltage of 24 V is achievable with a 20 mA current into a 1200-Ω load (using the yellow test lead).

[4] The positive or negative pulse width must be greater than 50 µs to enable adjustment of duty cycle or pulse width under different frequencies. Otherwise, the accuracy and range will be different from the specifications defined.

[5] For signal frequencies greater than 1 kHz, add an addition of 0.1% per kHz.

General Specifications

Display	Both primary and secondary displays are 5-digit on the liquid crystal display (LCD) with a maximum resolution of 51,000 counts and automatic polarity indication. Backlight available.
Power supply	• **9.6 V Ni-MH rechargeable batteries:** 1.2 V x 8 pieces. *No cadmium, lead or mercury.* • **External switching adapter:** AC 100 V to 240 V, 50/60 Hz input and DC 24 V/2.5 A output
Power consumption	• **Battery charging:** 9.3 VA typical • **Sourcing of constant current at 25 mA, maximum load:** 5.5 VA typical on 24 V DC adapter, 2.4 VA typical on 9.6 V batteries • **Meter only:** 1.8 VA typical on 24 V DC adapter, 0.6 VA typical on 9.6 V batteries
Battery life	Assuming fully-charged Ni-MH batteries: **Meter only:** 20 hours (approx.) **Source/Meter:** 4 hours (approx.) [+ −] will appear when voltage drops below 9 V (approx.)
Charging time	3 hours (approx.) in 10 °C to 30 °C environment NOTE: Prolonged charging is required if battery is fully discharged.
Measurement rate	3 readings/second, except for: • **AC+DC:** 1 reading/second • **Frequency and duty cycle (> 1 Hz):** 1 reading/second • **Pulse width (> 1 Hz):** 0.25 to 1 reading/second
Common Mode Rejection Ratio (CMRR)	> 90 dB at DC, 50/60 Hz ± 0.1% (1 kΩ unbalanced)
Normal Mode Rejection Ratio (NMRR)	> 60 dB at DC, 50/60 Hz ± 0.1%
Operating environment	0 °C to 40 °C; up to 80% relative humidity (R.H.) for temperatures up to 31 °C, decreasing linearly to 50% R.H. at 40 °C
Storage environment	–20 °C to 60 °C with batteries removed; 5% to 80% R.H. non-condensing
Altitude	0 to 2000 m
Safety compliance	IEC 61010-1:2001/EN61010-1:2001 (2nd Edition), CAN/CSA-C22.2 No. 61010-1-04, ANSI/UL 61010-1:2004, CAT II 150 V Overvoltage Protection, Pollution Degree 2
EMC compliance	IEC61326-2-1:2005/EN61326-2-1:2006, ICES-001:2004, AS/NZS CISPR11:2004
Temperature coefficient	• **Input:** 0.15 x (specified accuracy)/°C (from 0 °C to 18 °C or 28 °C to 40 °C) • **Output:** ±(50 ppm output + 0.5 digit)/°C
Dimensions (H x W x D)	192 mm x 90 mm x 54 mm
Weight	0.98 kg with holster and batteries
Calibration	One-year calibration cycle recommended
Warranty	• 3 years for main unit • 3 months for standard accessories unless otherwise specified

Ordering Information

U1401A

U1401B

Standard shipped items

- Quick Start Guide
- Certificate of Calibration (CoC)
- Calibrator/Meter standard test lead kit
- Yellow test lead for mA simulation
- Protective holster
- Rechargeable battery pack
- AC power adapter and cord (according to country)

** Soft carrying case is included for U1401A*

Optional accessories

U5481A IR-to-USB cable

U1186A K-type thermocouple and adapter

U1181A Immersion temperature probe
U1182A Industrial surface temperature probe
U1183A Air temperature probe

U1168A Standard test lead kit

U5491A Soft carrying case

U5402A Yellow test lead for mA simulation

More accessories at: **www.agilent.com/find/handheld-calibrator-meter**

Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

Agilent Direct

www.agilent.com/find/agilentdirect
Quickly choose and use your test equipment solutions with confidence.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

www.agilent.com/find/removealldoubt

Product specifications and descriptions in this document subject to change without notice.

www.agilent.com

www.agilent.com/find/handheld-calibrator-meter

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

Americas	
Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific	
Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East	
Austria	01 36027 71571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700* *0.125€/minute
Germany	07031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:
www.agilent.com/find/contactus

Revised: October 6, 2008

© Agilent Technologies, Inc. 2009
Printed in USA, November 26, 2009
5990-3459EN

Agilent Technologies

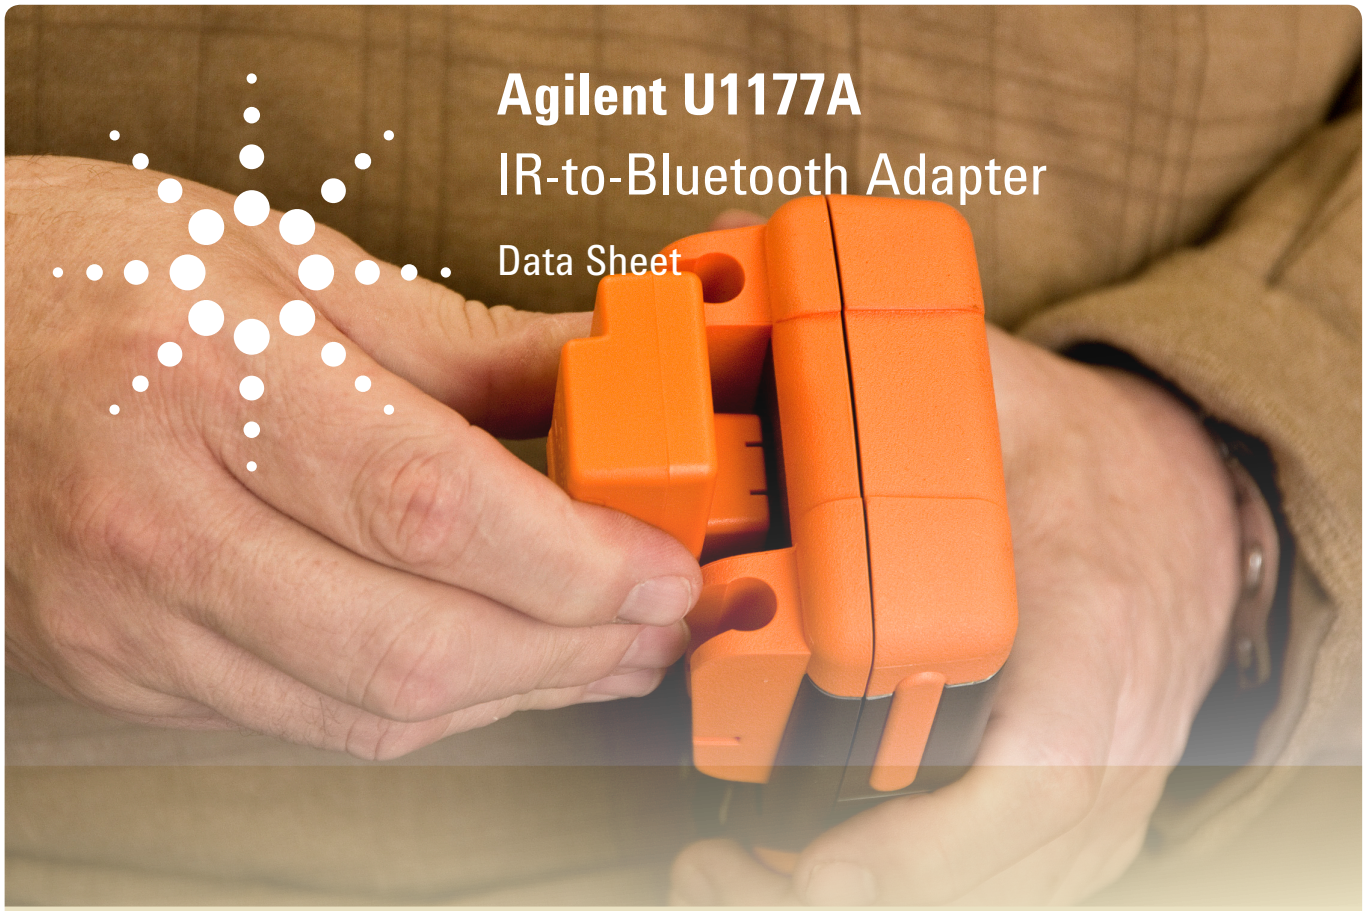

Agilent U1177A
IR-to-Bluetooth Adapter
Data Sheet

Features

- Enables Bluetooth® connection to Agilent handheld digital multimeters
- Easy to install by attaching to Infrared (IR) port located at the back of Agilent handheld digital multimeters
- Compatible with Agilent U1230 series, U1240 series, U1250 series and U1270 series handheld digital multimeters
- Operated by two 1.5 V AAA batteries

The Bluetooth® word mark and logos are registered trademark owned by Bluetooth SIG, Inc and any use of such marks by Agilent Technologies, Inc. is under license. Other trademark and trade names are those of their respective owners.

Agilent U1177A Infrared (IR)-to-Bluetooth® adapter offers wireless remote connectivity solution via Bluetooth® connection simply by attaching the adapter to the IR port of an Agilent handheld digital multimeter. The wireless remote connectivity is set up when an Agilent handheld digital multimeter is connected to U1177A and an Android device (tablet or smart phone) with the installed software. Every U1177A also has a unique Media Access Control (MAC) address. User can quickly and easily scan for the right U1177A using their Android device and pair up with the U1177A.

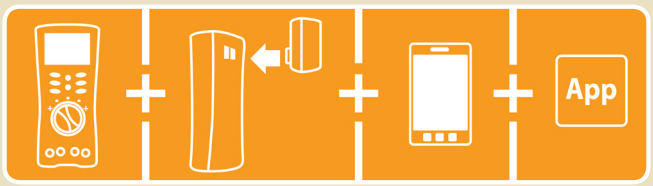

Figure 1. Agilent wireless remote connectivity solution

Take a closer look

Figure 2. The U1177A as illustrated

Perform data logging with multimeters – wirelessly!

Figure 3. Data logging with Agilent Mobile Logger software.

Data logging is an important function for industrial users to capture data streams or plotting trending graphs. These data and graphs are used for analysis to identify intermittent behavior or detect drifts. Agilent Mobile Logger is the free Android application software that logs data and provides trending graphs from Agilent handheld digital multimeters. Agilent Mobile Logger offers an array of extended functions such as sending e-mail or Short Message Service (SMS) automatically, and pan and zoom function via the Android device's touch screen. Alternatively, data logging and monitoring activities can also be performed at the comfort of one's Personal Computer (PC) via a downloadable Agilent GUI data logger software.

Notes:

1. *Agilent Mobile Meter and Agilent Mobile Logger can be downloaded from www.agilent.com/find/hh-Android or from Android Market (https://market.android.com/)*
2. *Agilent GUI Data Logger Software can be www.agilent.com/find/hh-logger*

Perform up to three multimeter measurements at the same time with Agilent Mobile Meter

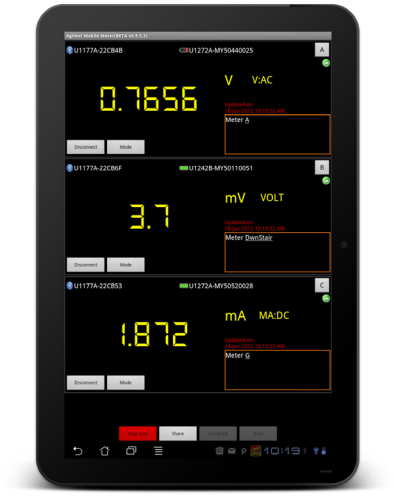

Figure 4. Up to three multimeters measurements with the Agilent Mobile Meter

Agilent Mobile Meter is a free Android application software that allows an Android device to connect, control and perform up to 3 multimeter measurements. Without the need to be physically present at various points, users can now extend their reach to two or three places. This solution allows you to make measurements from a safe distance, eliminates the need to walk back-and-forth between measure target and control points, and monitors multiple measurements simultaneously. Achieve higher work productivity when you use the U1177A with your Agilent handheld digital multimeters.

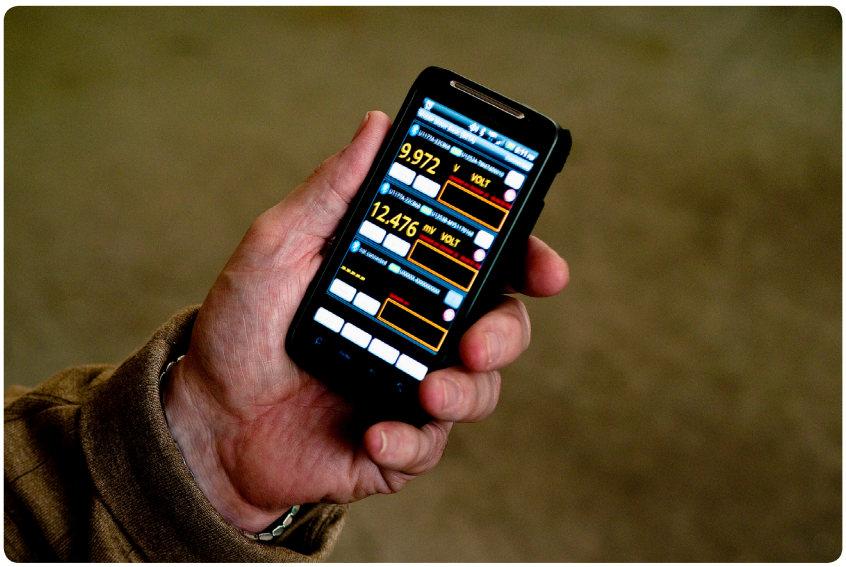

Figure 5. Make measurements with the Agilent Mobile Meter via an Android smart phone

Specifications

Product characteristics	Description
Radio specification	• Frequency: 2402 MHz ~ 2480 MHz • Antenna Power: 1 mW or less • Number of Channels: 79 • Modulation: GFSK / PSK
Operating environment	Operating temperature from –20 to 55 °C
Storage environment	Storage temperature from –40 to 70 °C
Relative humidity (R.H.)	Relative humidity up to 95% at 40 °C (non-condensing)
Power consumption	Maximum 130 mVA for two 1.5 V AAA batteries
Battery life	30 hours typical (based on continuous data transfer)
Battery type	Alkaline 24 A (ANSI/NEDA) and LR03 (IEC), or Zinc Chloride 24 D (ANSI/NEDA) and R03 (IEC)
Dimension (W x H x L)	39.0 × 71.0 × 37.0 mm
Weight	60 g with batteries
Warranty	Three months
Bluetooth	"**Bluetooth**" Version 2.1 + EDR compliant, SPP profile, Class 2 device (with 10 metres connection range)
Safety	The U1177A complies with the requirements of the following safety and regulation standards: • FCC Part15C (Certification) (15.209, 15.247) FCC ID: ZKMAGILENT-U1177A • FCC Part15B (DoC) (15.109) • RSS–210 Issue 8:2010 IC: 6310A–U1177A • ICES–003 Issue 4:2004 • EN 300 328 V1.7.1:2008 • EN 301 489–1V1.8.1:2008/–17 V2.11:2009 • EN 55022:2006+A1:2007/EN55024:1998+A1:2001+A2:2003 • EN 50371:2002 • EN 60950–1:2006/A11:2009/A1:2010 • Complies with IDA Standards (DB 102425) • India Equipment Type Approval (ETA) Certificate No: 1424/2011/WRLO • COFETEL Certificate No: RCPAGU111-1066, registered under Agilent Technologies Mexico S de RL de CV "This telecommunication equipment conforms NTC technical requirement"

Standard shipped items:

- Two 1.5 V AAA batteries
- Operating instructions

www.agilent.com
www.agilent.com/find/U1177A

Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

www.axiestandard.org
AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.

www.lxistandard.org
LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

www.pxisa.org
PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Agilent Channel Partners

www.agilent.com/find/channelpartners
Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

Agilent Advantage Services

Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices

Agilent Electronic Measurement Group
DEKRA Certified
ISO 9001:2008
Quality Management System
www.agilent.com/quality

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:
www.agilent.com/find/contactus

Revised: January 6, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012
Published in USA, February 2, 2012
5990-9531EN

Agilent Technologies